

# Order and Quote Form



## Premium Threshold - With Sill Only AA Wave Grate & Ti Tile Insert Grate Styles

### Select Grate Style



AA Wave Grate

Wave Grate Colour Finish

- Satin/ Aluminium
- Matte Black
- Brass Gold



Ti Tile Insert


Tile Thickness  
\*For tile insert grate style only

- Tiles up to 10mm thick
- Tiles up to 16mm thick (Additional Charge Applies)
- Tiles up to 20mm thick (Additional Charge Applies)

### Grate Width

**65mm (Only available for Tile Insert)**  
(Minimum door track depth 35mm) O/A Width = 81mm + Door Track Width  
**100mm**  
(Minimum door track depth 30mm) O/A Width = 115mm + Door Track Width

### Channel + Door Track Dimensions

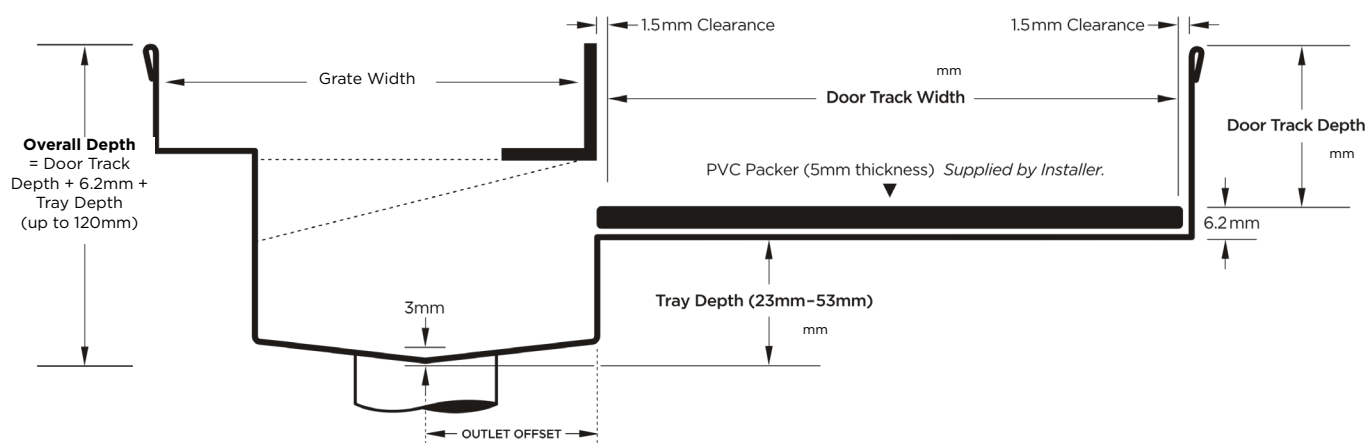

### Length + Outlet Requirements

Please include drainage length and all required outlets.


#### Required Outlet Size

65 & 100mm Grates	32mm	38mm	44mm	51mm
100mm Grates only	63mm	76mm	89mm	

#### Optional Components (Additional Charges Apply)

- Concrete Ties (50mm x 20mm / 10mm hole)
- Stainless Steel Packer (5mm Thickness)
- Grate Electropolishing (recommended for installation in marine or pool area environments) (Tile Insert only)
- Overflow Outlet

**PLEASE NOTE** Minimum channel length equals door track length plus 6mm. Grates longer than 1500mm and Tile Inserts longer than 1200mm are supplied in multiple sections. Channels 2950mm maximum in one piece, channels over 2950mm are supplied in multiple sections with joiner. See AS3500 standard & local regulator for specific outlet & drainage requirements.  
+/- 2mm tolerance on dimensions.

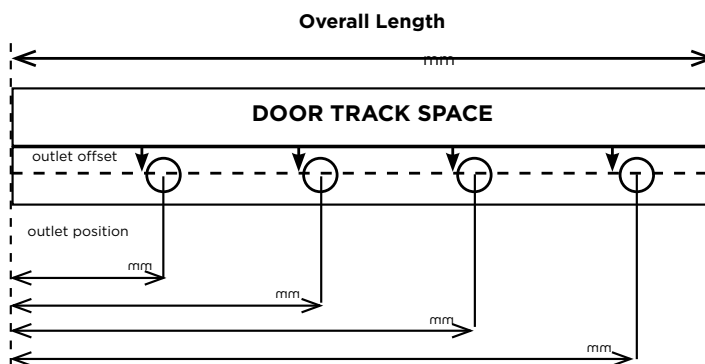

Full Name

Email Address

Company Name

Order Number

Stormtech Quote Number

Telephone

Signature