


# SD90 Slot Drain Installation

## Concrete installation

INTAKE

40x3mm slots, 1.0 l/s per metre

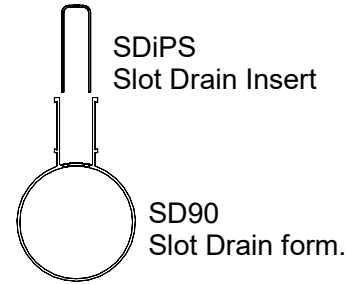

Fix a screw or nail through the end of the SD90 form to support the SDi beige insert at the desired height. It should be set to finish 2mm lower than FFL.

Secure drain, it will float & move when concreting.

Bed the SD90 to create desired fall to outlet. Use standard 90mm fittings to join to stormwater system

Trench as per standard stormwater requirements.

Finish concrete 2mm higher than Slot Drain insert

2mm

